

# Promat


## Promat Australia Pty. Ltd.

# SYSTEM CERTIFICATE\*

This is to certify that

## Promat Firestopping Products

For floors have been tested/approved in accordance with “Australian Standard 1530: Part 4 Methods for fire tests on building materials, components and structures” protecting service penetrations through **Promat SYSTEMPANEL® 2G**. (Reports A-20-016, A-20-024)

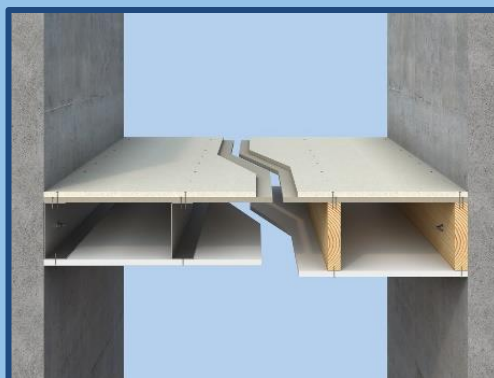

Service	Fire Stopping	FRL
100mm uPVC stack pipe	PROMASEAL® FC100 Retrofit Collar	-/120/120
50mm uPVC stack pipe	PROMASEAL® FC50 Retrofit Collar	-/120/120
40mm uPVC stack pipe	PROMASEAL® FC40 Retrofit Collar	-/120/120
100mm uPVC floor waste	PROMASEAL® FWR Retrofit Collar	-/120/120
6 x TPS electrical cables (3 x 2.5mm <sup>2</sup> cores)	50mm cone of PROMASEAL® A Acrylic Sealant	-/120/120
2 x TPS electrical cables (3 x 2.5mm <sup>2</sup> cores) passing through the floor only	10mm cone of PROMASEAL® A Acrylic Sealant	-/120/120
2 x TPS electrical cables (3 x 2.5mm <sup>2</sup> cores) passing through the ceiling only	10mm cone of PROMASEAL® A Acrylic Sealant	-/120/120
6mm diameter steel threaded rod	50mm cone of PROMASEAL® A Acrylic Sealant on floor and ceiling	-/120/120
20mm Copper Pipe (Type B)	400mm PROMASEAL® SupaWrap on top side only	-/120/120
20mm Copper Pipe (Type B) with 25mm thick FR Armaflex lagging	PROMASEAL® FC65 Retrofit Collar	-/120/120

\* This is NOT a test certificate. For installation instructions or further information please contact Promat Australia Pty. Ltd.

Dial: 1800 PROMAT (776 628)

Email: [mail@promat.com.au](mailto:mail@promat.com.au)

Visit: [www.promat.com.au](http://www.promat.com.au)